

Material Specification	Grade 6082 T6 Aluminium Alloy
Loading Specification	For simply supported single Ladder Beams to Eurocode EN 1991-1/BS EN 8118. All load values are working loads. All load values are based on the compression chords restrained at 1.0m centres.

Overall Graded Results for Allowable Working Loads

Compression chord restraint at 1.0m intervals

		Span (m)			
		3	6	9	12
Allowable Bending Moment	kNm	3.9	7.2	8.1	9.0
Allowable Shear (Load on vertical)	kN	4.0	4.5	4.7	4.8

Weight	4.27kg/m
Area	1188mm ²
I _x	9.8x10 ⁶ mm ⁴
I _y	2.9x10 ⁹ mm ⁴
C _x	228mm
C _y	24.15mm
E	7x10 ⁴ N/mm ²

Type of Loading		Span (m)										
		2	3	4	5	6	7	8	9	10	11	12
Uniformly distributed load	kN/m	4.0	2.7	2.3	1.8	1.5	1.2	1.0	0.8	0.7	0.6	0.5
Total UDL	kN	8.0	8.0	9.0	9.0	9.0	8.2	8.1	7.2	6.5	6.6	6.0
Single point load	kN	7.8	5.2	7.2	5.8	4.8	4.1	4.1	3.6	3.2	3.3	3.0
Two point loads	Each kN	4.0	3.9	4.5	4.3	3.6	3.1	3.0	2.7	2.4	2.5	2.2
Three point loads	Each kN	2.7	2.6	3.0	2.9	2.4	2.1	2.0	1.8	1.6	1.6	1.5

- Notes:**
- Above allowable loads can be increased by 1.11 for wind load only cases.
 - The tables above for single and two point locations assume all loads are applied at beam node points.
 - The tables above for UDL and three point load conditions make an allowance for local bending.
 - If the restraint of the beam compression chords does not comply with 1.0m centres, further design checks are required.
 - Allowable loads take into account the self weight of the beam.
 - The tables above are based on the support conditions for the beams to occur at a beam node point.
All beams are assumed simply supported.
 - Supporting calculations are based on BS EN 1999-1-2 A2.
 - Maximum single point load 10kN (to be positioned as close to the node as possible).
 - Factor of Safety 1.65.
 - Permissible loads calculated in accordance with EN 1999-1-1:2007 and obtained through physical testing to EN 12811 Part 3.
 - Restraint point must support both top and bottom booms at restraint location.


Additional Information	Our welders are qualified to: EN 287-1 AS/NZS 1665 2004 BS EN 9606-2 2004 ISO 5817 2007 Welding and material test certs available on request. Apollo Scaffold Services are accredited to EN 1090-1:2009+A1:2011 - Execution of steel structures and aluminium structures (0086-CPR-637568). The manufacture (including welding) of structural work in steel and aluminium up to and including Execution Class 2 (EXC 2) as defined in EN 1090-2 and EN 1090-3. Full set of calculations available on Apollo Scaffold Services website: apolloscaffoldservices.co.uk
-------------------------------	--

Disclaimer	Apollo Scaffold Services Ltd. advise on using a qualified structural engineer to design any project using aluminium beams.
-------------------	---



Material Specification	Grade 6082 T6 Aluminium Alloy
Dimension Specification	Tube: 48.3mm dia. x 4.2-4.4mm wall thickness
<div style="display: flex; justify-content: space-around; align-items: center;"> <div data-bbox="225 468 639 763"> </div> <div data-bbox="778 439 1390 510" style="color: red; text-align: center;"> <p>If the Made In Britain hologram sticker is not present, then specification is invalid.</p> </div> <div data-bbox="1002 546 1161 775"> </div> </div> <div style="display: flex; justify-content: space-around; margin-top: 10px;"> <div data-bbox="288 826 596 862" style="text-align: center;">Main Boom & Verticals</div> <div data-bbox="970 730 1198 840" style="text-align: center;"> <p>1] </p> <p>1. Serial number</p> </div> </div>	
Fixing Specification	M12x65 Grade 8.8 Zinc Plated Bolts and Nyloc Nuts
<div style="text-align: center; margin-bottom: 10px;">Grade 8.8 Zinc Plated Nyloc Nuts</div> <div style="display: flex; justify-content: space-around; margin-top: 10px;"> <div data-bbox="708 1126 900 1193" style="text-align: center;"> </div> <div data-bbox="1358 1256 1422 1283" style="text-align: center;">Spigot</div> </div> <div style="display: flex; justify-content: center; margin-top: 10px;"> <div data-bbox="708 1373 900 1563" style="text-align: center;"> </div> </div> <div style="text-align: center; margin-top: 10px;">M12x65 Grade 8.8 Zinc Bolts</div>	
Additional Information	<p>Our welders are qualified to: EN 287-1 AS/NZS 1665 2004 BS EN 9606-2 2004 ISO 5817 2007 Welding and material test certs available on request.</p> <p>Apollo Scaffold Services are accredited to EN 1090-1:2009+A1:2011 - Execution of steel structures and aluminium structures (0086-CPR-637568). The manufacture (including welding) of structural work in steel and aluminium up to and including Execution Class 2 (EXC 2) as defined in EN 1090-2 and EN 1090-3. Full set of calculations available on Apollo Scaffold Services website: apolloscaffoldservices.co.uk</p>
Disclaimer	<p>Apollo Scaffold Services Ltd. advise on using a qualified structural engineer to design any project using aluminium beams.</p>

Key Dimensions	Dimensions of Beam and Spigot Connection
Standard Beam Lengths	915mm (3ft) / 1220mm (4ft) / 1525mm (5ft) / 1830mm (6ft) / 2135mm (7ft) / 2440mm (8ft) / 2745mm (9ft) / 3050mm (10ft) / 3355mm (11ft) / 3660mm (12ft) / 3965mm (13ft) / 4270mm (14ft) / 4575mm (15ft) / 4880mm (16ft) / 5185mm (17ft) / 5490mm (18ft) / 5795mm (19ft) / 6100mm (20ft) / 6405mm (21ft) / 6710mm (22ft) / 7015mm (23ft) / 7320mm (24ft) / 7625mm (25ft) / 7930mm (26ft)

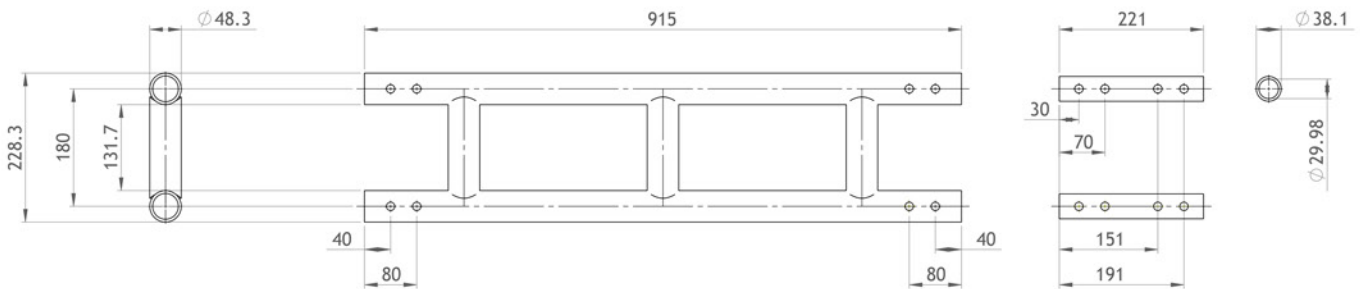

Spigot connections can be introduced at any location in a beam span and don't impact on the beam capacities quoted

Additional Information	<p>Our welders are qualified to: EN 287-1 AS/NZS 1665 2004 BS EN 9606-2 2004 ISO 5817 2007 Welding and material test certs available on request.</p> <p>Apollo Scaffold Services are accredited to EN 1090-1:2009+A1:2011 - Execution of steel structures and aluminium structures (0086-CPR-637568). The manufacture (including welding) of structural work in steel and aluminium up to and including Execution Class 2 (EXC 2) as defined in EN 1090-2 and EN 1090-3. Full set of calculations available on Apollo Scaffold Services website: apolloscaffoldservices.co.uk</p>
Disclaimer	<p>Apollo Scaffold Services Ltd. advise on using a qualified structural engineer to design any project using aluminium beams.</p>